

**BÜFA**




## **Gelcoat spraying unit GSU Delta5.5**

Gelcoat spraying for medium  
to large sized mouldings

**Gelcoat application**

# Gelcoat spraying unit GSU Delta5.5

Ideal machine for the application of gelcoat, topcoat, barriercoat and even resins. Machine with a slave pump for dosing the catalyst. Recommended for medium to large sized parts up to 3 m<sup>2</sup>

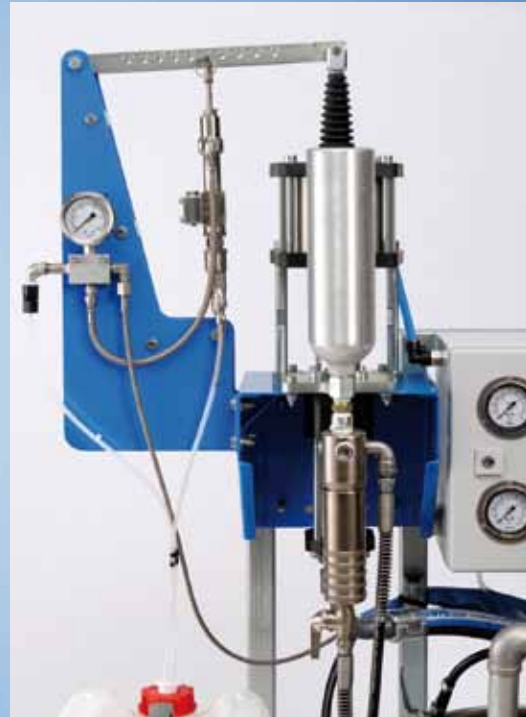

## Facts and features

- Easy handle of the machine.
- Proved, robust Century gun technology.
- External mixing technology with a soft and low emission spray jet improving deairing of gelcoat.
- Reduction of styrene emissions.
- Excellent mixing of peroxide due to the EXACT injection system.
- Slave pump for dosing the peroxide with a mechanical adjustment.
- Low and easy maintenance.
- Innovative main pump technology.
- Does not require cleaning due to the external mixing system.
- Individual customer configurations also available.

### BUFAtec Spain

Polígono Industrial Sud-Est  
Paseo Sanllehy, s/n. Nave 40  
08213 Polinyà  
Barcelona (Spain)  
Phone +34 93 714 94 10  
bufatec@bufatec.es  
www.bufatec.es

A member of the BÜFA Group

## Technical specifications

Discharge performance, water	max. 7.6 l/min.
Volume per cycle	126 ml
Pressure transmission ratio	17:1
Air pressure max.	8 bar
Air consumption approx.	200-800 l/min.
Length of hoses	7.5 m

The information given above is based on our current state of knowledge and experience. In view of the many factors that may influence working conditions and the application of our products, the user is not relieved from carrying out his own tests and experiments. Not legally binding warranty of certain properties or suitability for a particular purpose can be derived from this information. It is the responsibility of the receiver or user of our.

You'll find further information at our web page.