

**BUFA**



## **Polybar**

Effective utilisation of material

**Metering devices**

# BÜFAtec metering device Polybar

With our established metering device Polybar the resin is conveyed by a double action, wear-free Teflon bellows pump. Clean and efficient



## Facts

- No leakage of resin through a PTFE pump.
- Variable pumping capacity.
- Hardener is metered by adjustable hardener pump lift. The resin and hardener pumps are pneumatically coupled (patented).
- Hardener transport through a separate spout can be continuously controlled.
- Resin and hardener emerges separately at the same time allowing a pre-mixing.

## Advantages

- Exact and repetitious dosing of resin and peroxide.
- No weighing and re-filling.
- No loss of material.
- Increased safety and cleanliness at the workplace.
- The mixing ratio can only be changed inside the case by a responsible person (key necessary).


### BÜFAtec Spain

Polígono Industrial Sud-Est  
Paseo Sanllehy, s/n. Nave 40  
08213 Polinyà  
Barcelona (Spain)  
Phone +34 93 714 94 10  
bufatec@bufatec.es  
www.bufatec.es

A member of the BÜFA Group

## Specifications

Capacity	up to 15 kg/min. with low viscosity laminating resin
Case	stainless steel
Dimensions (L/W/H)	600 x 210 x 380 mm
Air connection	single-hand coupler NW 7 (filtered air)
Resin pump	100 ml (double stroke)
Resin suction line	1.5 m hose with suction pipe and suction filter for drum removal
Hardener suction line	1 m hose with suction filter

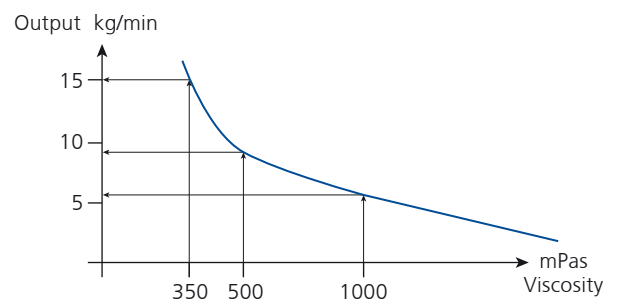

The information given above is based on our current state of knowledge and experience. In view of the many factors that may influence working conditions and the application of our products, the user is not relieved from carrying out his own tests and experiments. Not legally binding warranty of certain properties or suitability for a particular purpose can be derived from this information. It is the responsibility of the receiver or user of our. You'll find further information at our web page.