


BÜFA

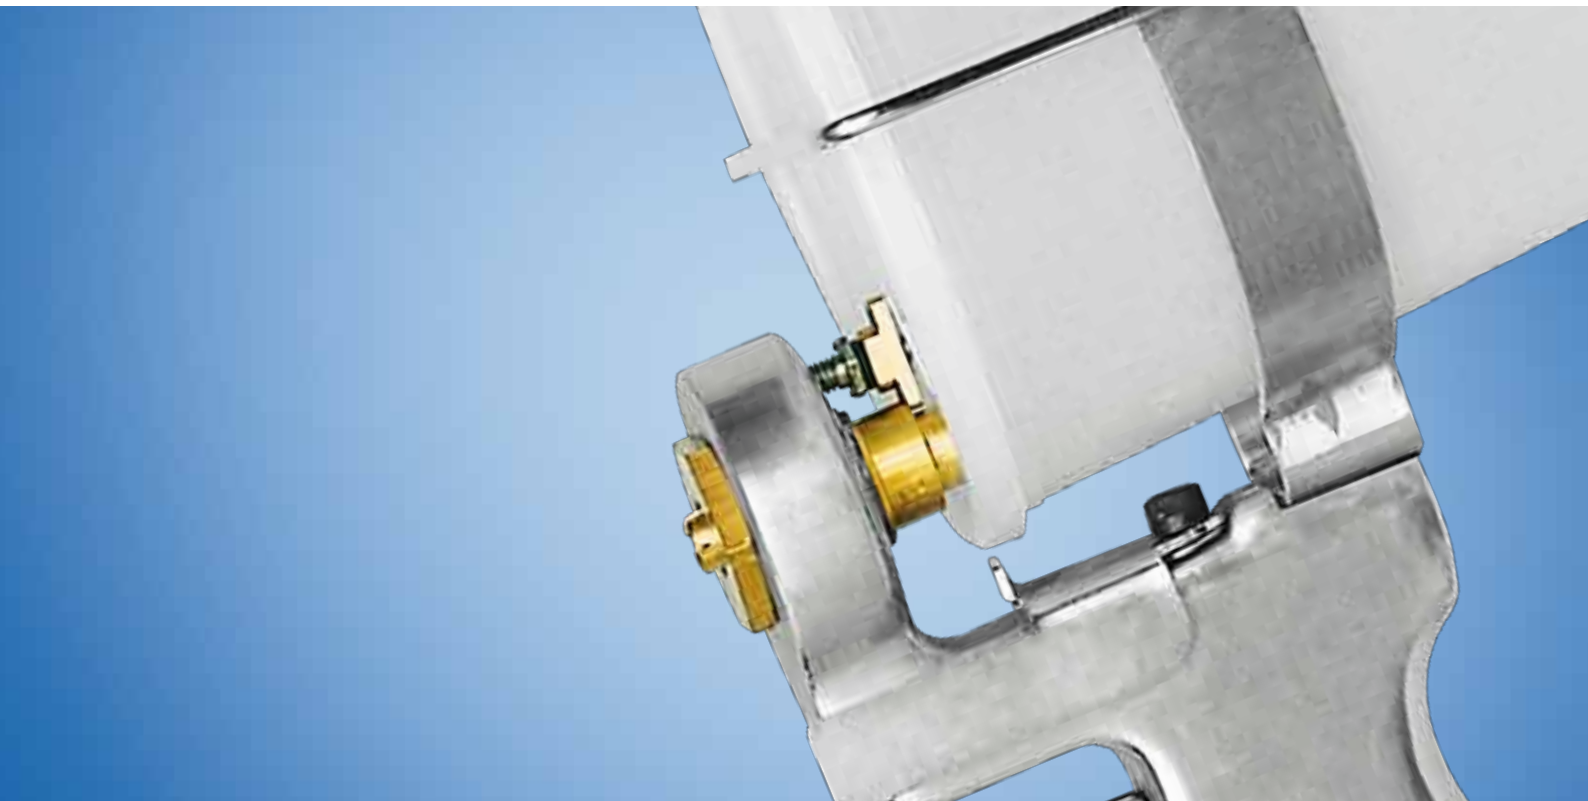

Polycon

For spraying gelcoats and fillers


Gelcoat application

Polycon

Greatest possible flexibility through nine nozzle sizes and two container sizes, making it suitable for practically all types of gelcoats with the most different viscosities



Accessories

 **Polycon nozzle set (9 nozzles)**

Nozzles (single)

- 0.8 ø Polycon nozzle N° 1
- 1.6 ø Polycon nozzle N° 2
- 2.4 ø Polycon nozzle N° 3
- 3.2 ø Polycon nozzle N° 4
- 4.0 ø Polycon nozzle N° 5
- 4.8 ø Polycon nozzle N° 6
- 5.6 ø Polycon nozzle N° 7
- 6.4 ø Polycon nozzle N° 8
- 7.2 ø Polycon nozzle N° 9

Container

- Container size 1 litre
- Lid for container 1 litre
- Container size 2.5 litre
- Lid for container 2.5 litre

Bow

- Bow for 1 litre container
- Bow for 2.5 litre container

BUFAtec Spain


Polígono Industrial Sud-Est
Paseo Sanllehy, s/n. Nave 40
08213 Polinyà
Barcelona (Spain)
Phone +34 93 714 94 10
bufatec@bufatec.es
www.bufatec.es

A member of the BÜFA Group

Specifications

Material	aluminium
Air requirements (gelcoat)	max. 3.5 l/min.
Air pressure	3.5 - 7 bar
Air consumption	400 - 800 l/min.
Weight	0.5 kg
Air connection	single hand coupler NW 7 (filtered air)

Nozzle and pressure selection

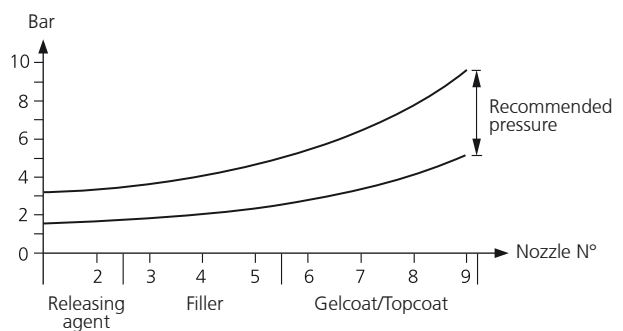

The information given above is based on our current state of knowledge and experience. In view of the many factors that may influence working conditions and the application of our products, the user is not relieved from carrying out his own tests and experiments. Not legally binding warranty of certain properties or suitability for a particular purpose can be derived from this information. It is the responsibility of the receiver or user of our. You'll find further information at our web page.